




Features

- ▶ Full extension
- ▶ Side mount
- ▶ Height: 2-9/64" (54.5 mm)
- ▶ Side spacing: 1/2" (12.7 mm)
- ▶ Load rating: 200 lbs. (24" Length)
- ▶ Electro zinc finish (black available)
- ▶ Lengths: 10" – 32"
- ▶ Packaging:
 - 10" – 18" 10 pair per carton
 - 20" – 32" 5 pair per carton
- ▶ Trigger release disconnect
- ▶ Breather tab self adjustment to accommodate variation in side clearance
- ▶ Anti-rebound Bumper
- ▶ Non-handed
- ▶ Screw mounting system is 32 mm compatible
- ▶ Easy access window to reach hole in cabinet member in closed position
- ▶ Detent-in closed position
- ▶ RoHS/ANSI/BIFMA/BHMA compliant

Applications

- ▶ Commercial furniture
- ▶ Mechanical equipment
- ▶ Electronic enclosures
- ▶ File drawers
- ▶ Kitchens

Dimensions

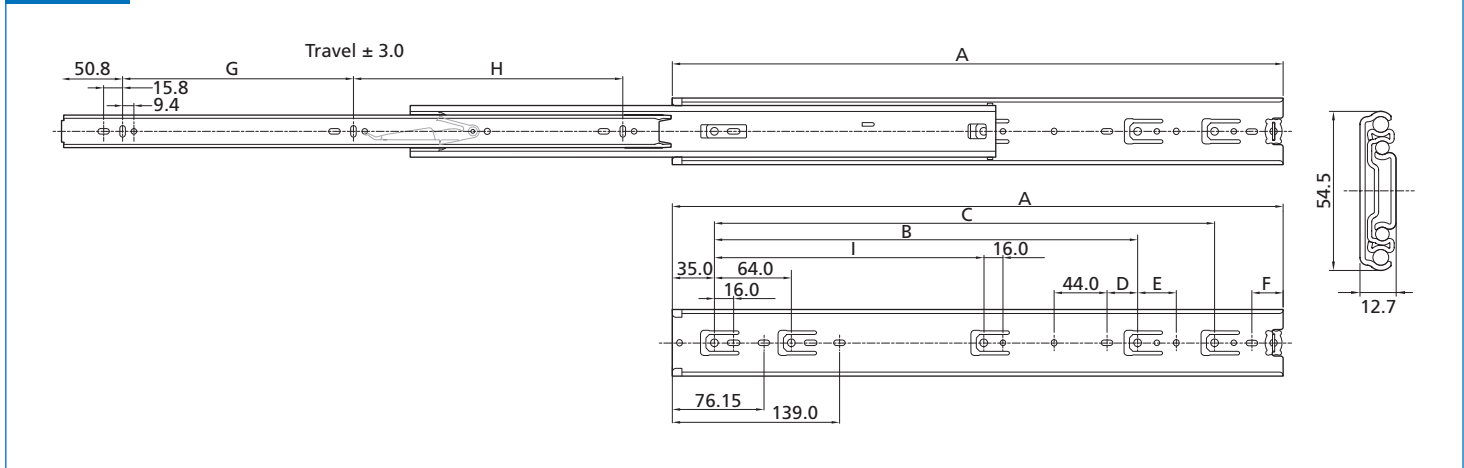

Item Number	Length		Travel		A		B		C		D		E		F		G		H		I		
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inch	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	
11517 04 150	10	250	10	254	10	254									6-5/8	169					6-5/16	160	
11517 04 151	12	300	12	305	12	305									3-3/4	96	5	128			8-13/16	224	
11517 04 152	14	350	14	356	14	356								1-13/16	46	5	128	5	128		8-13/16	224	
11517 04 153	16	400	16	406	16	406	11-1/4	288						1-5/16	33	6-5/16	160	6-5/16	160		8-13/16	224	
11517 04 154	18	450	18	457	18	457	13-7/8	352			1	25	1-1/4	32		6-5/16	160	7-9/16	192		8-13/16	224	
11517 04 155	20	500	20	508	20	508	13-7/8	352	16-3/8	416	1	25	1-1/4	32		7-9/16	192	8-13/16	224		8-13/16	224	
11517 04 156	22	550	22	559	22	559	13-7/8	352	16-3/8	416	1	25	1-1/4	32	2-1/4	58	8-13/16	224	10-1/16	256		8-13/16	224
11517 04 157	24	600	24	610	24	610	13-7/8	352	18-7/8	480	1	25	1-1/4	32	1-13/16	45	10-1/16	256	10-1/16	256		8-13/16	224
11517 04 158	26	650	26	660	26	660	13-7/8	352	21-3/8	544	1	25	1-1/4	32		10-1/16	256	12-9/16	320		8-13/16	224	
11517 04 159	28	700	28	711	28	711	13-7/8	352	21-3/8	544	1	25	1-1/4	32	3-1/4	82	10-1/16	256	13-7/8	352		8-13/16	224
11517 04 160	30	750	30	750	30	762	16-3/8	416	26-15/32	672	1	25	1-1/4	32		11-3/8	288	15-1/16	384		8-13/16	224	
11517 04 161	32	800	32	813	32	813	16-3/8	416	26-15/32	672	1	25	1-1/4	32	2-13/16	56	12-9/16	320	15-1/16	384		8-13/16	224